LEDFUL

L Series

LI2.6 | LI2.8 | LI2.9 | LI3.9 | LI4.8 | LI5.9 | LI6.2

LO3.9 | LO4.8 | LO5.9 | LO6.2

- ☆ Front Maintenance
- ☆ Curved Installation
- ☆ No Light Leakage
- ☆ Light and Thin

Parameter

LEDFUL

L Series Outdoor	LO 3.9	LO 4.8	LO 5.9	LO 6.2
Pixel Pitch(mm)	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	65536	43264	28224	25600
Pixel Configuration	SMD1921	SMD2727	SMD3535	SMD3535
Brightness (nits)	≥4000	≥4500	≥4500	≥4000
Scan	1/16	1/13	1/7	1/10
Cabinet Resolution	128×128	104×104	84×84	80×80
Power Con. (Max / Avg)	800/250w/sq.m	780/250w/sq.m	820/260w/sq.m	800/250w/sq.m
Module Dimension	250x250mm / 0.82x0.82feet			
Cabinet Dimension	500x500x80mm / 1.64x1.64x0.26feet			
Cabinet Weight	8kg / 17.6lb (Die-casting Aluminum)			
Service Access	Front / Rear			
Rotation Angle	-10° and +10°			
Refresh Rate (HZ)	1920			
Grey Scale (bit)	16			
Viewing Angle (H/V)	160 / 160			
IP Rate	IP65			
Input Voltage (AC)	110 / 240			

* Specifications and photos are subject to change without prior notice.

L Series Indoor	LI 2.6	LI 2.8	LI 2.9	LI 3.9	LI 4.8	LI 5.9	LI 6.2
Pixel Pitch(mm)	2.604mm	2.84mm	2.976mm	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	147456	123904	112896	65536	43264	28224	25600
Pixel Configuration	SMD2121/SMD1515	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528	SMD3528
Scan	1/32	1/22	1/28	1/16	1/13	1/7	1/10
Cabinet Resolution	192×192	176×176	168×168	128×128	104×104	84×84	80×80
Power Con. (Max/Avg)	800/250w/sq.m	780/240w/sq.m	760/220w/sq.m	700/200w/sq.m	720/200w/sq.m	740/220w/sq.m	700/200w/sq.m
Module Dimension	250x250mm / 0.82x0.82feet						
Cabinet Dimension	500x500x80mm / 1.64x1.64x0.26feet						
Cabinet Weight	8kg / 17.6lb ((Die-casting Aluminum)						
Service Access	Front / Rear						
Rotation Angle	-10° and +10°						
Brightness (nits)	≥1000						
Refresh Rate (HZ)	3840						
Grey Scale (bit)	16						
Viewing Angle (H/V)	160 / 160						

IP Rate	IP31
Input Voltage (AC)	110 / 240

* Specifications and photos are subject to change without prior notice.

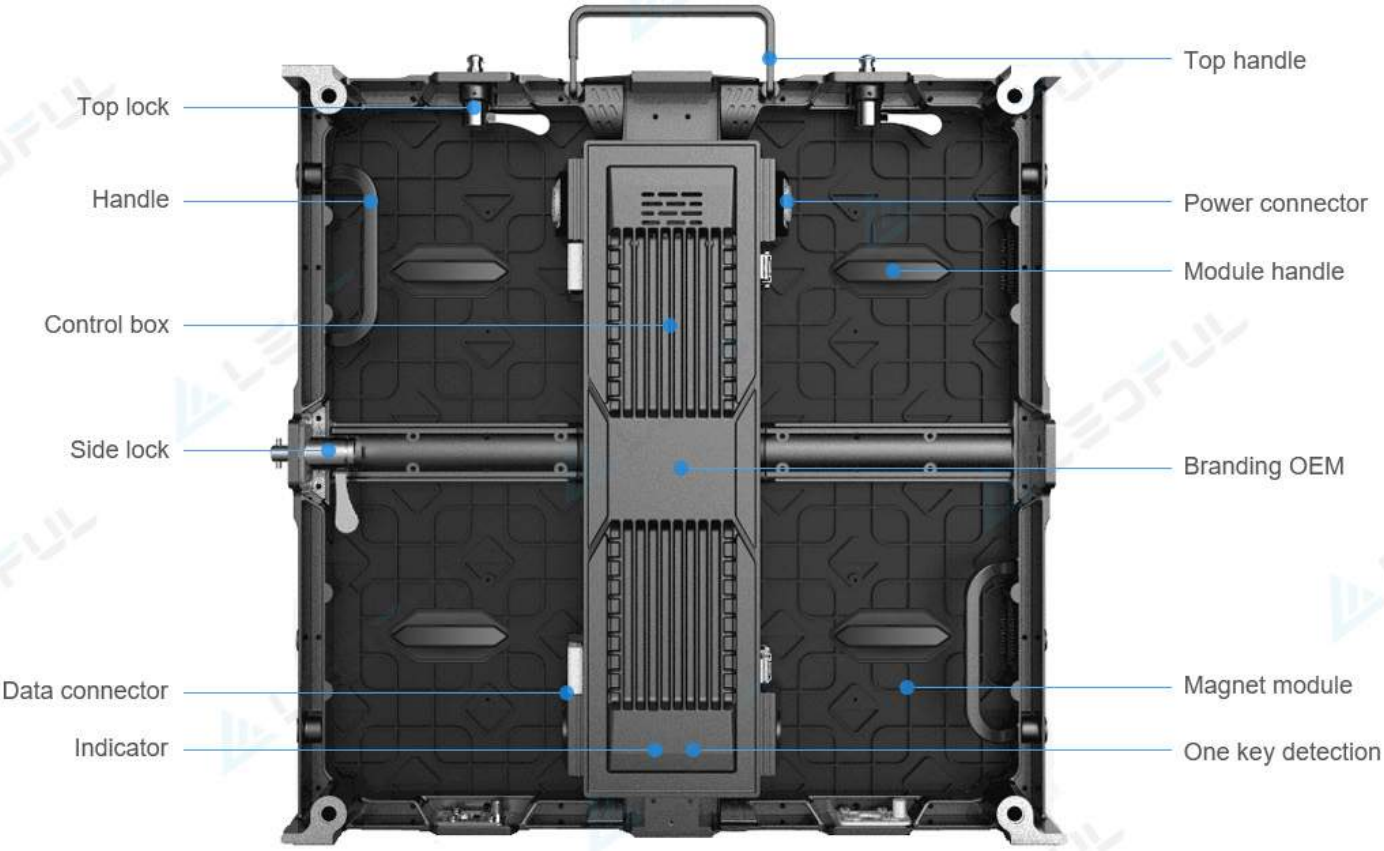

Front Maintenance

The magnet LED modules can be dismantled by tools on front side.

Curved Installation

Curved with every 2.5° between -10°and 10°, which can make convex and concave.

Curved Lock

Work with E Series

L series and E series can be installed together for various installation.

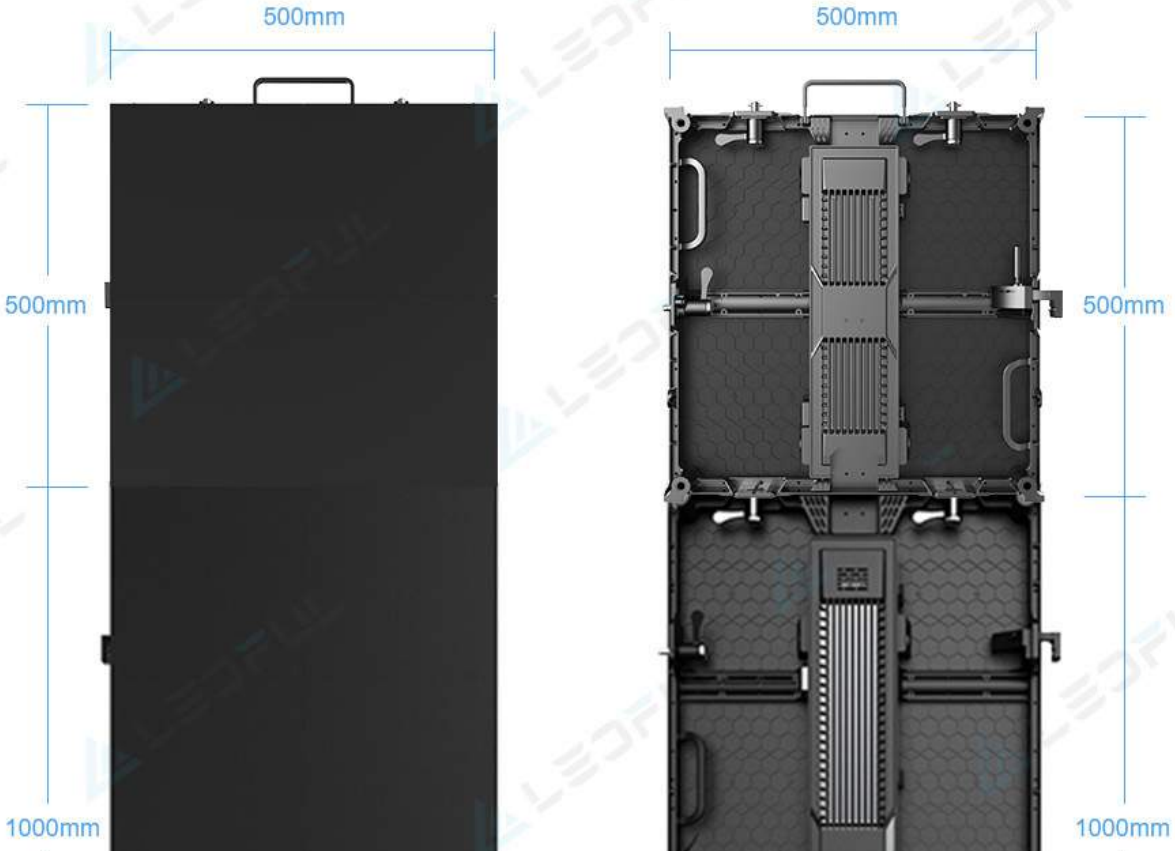

LEDFUL

Ultra Fast Response

The response speed exceeds the response limit of the naked eyes,
while playing the high speed dynamic images in an LED Screen,
it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

Perfect rendering dynamic picture

Response speed

Smear, Ghosting phenomenon

No light leakage trouble

No light leakage design with specific strips on side of cabinet and behind neighbour module.



Wide Viewing Angle

Both 160° from horizontal & vertical for the viewing angle.

Seeing from five directions, it would be still the natural and clear image in an LED display.

AUSTRALIA
9
ITALY
4
LORENTZ BRUUN
MILLER PAINT

Faster & Easier Installation

Hanging or stacking, L series with light and thin features makes installation faster and easier.

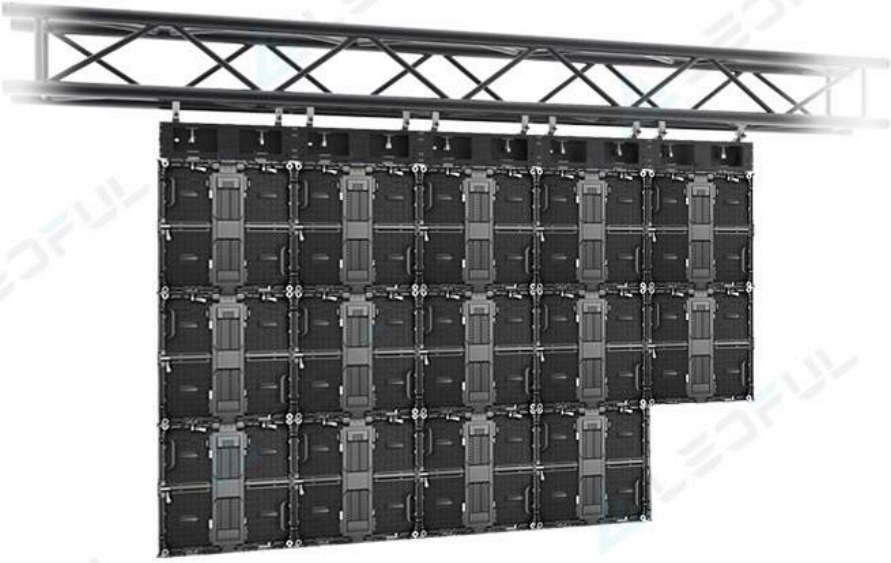

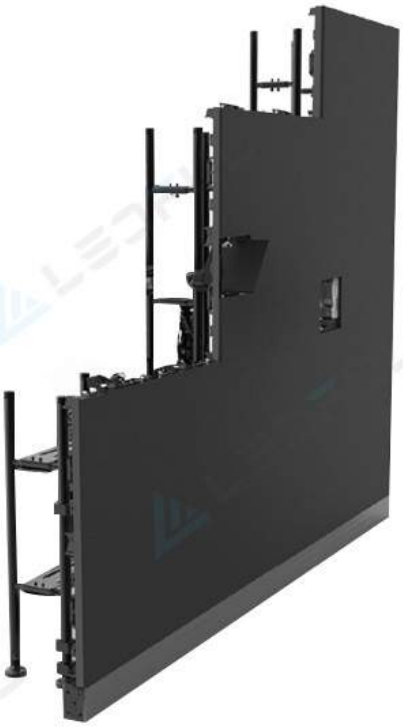

Accessories

Power Cable

Data Cable

Main Power Cable

Main Data Cable

Controller &Processor

Front Maintenance Tool

Curved Lock

Hanging Bar

sales@LEDFUL.com

+86-135-30172435

www.LEDFUL.com